

9-14-00

PATENT

ATTORNEY'S DOCKET NO. A
M09370

PATENT APPLICATION TRANSMITTAL LETTER

jc511 U.S. PTO
09/502816
02/11/00

TO THE COMMISSIONER OF PATENTS AND TRADEMARKS:

Transmitted herewith for filing is the patent application of _____
William D. Lanyi, Jeffery C. Ehlers, Blake R. Suhre
for Simplified Docking Method and Apparatus for a Multiple Engine Marine Vessel

Enclosed are:

X 7 sheets of drawing.

X an assignment of the invention to BRUNSWICK CORPORATION

☐ a certified copy of a _____ application.

☐ associate power of attorney.

CLAIM AS FILED

FOR	NUMBER FILED	NUMBER EXTRA	RATE	FEE
Total claims -----	<u>20 - 20 =</u>	<u>0</u>	<u>X \$18 =</u>	<u>0</u>
Independent claims -----	<u>3 - 3 =</u>	<u>0</u>	<u>X \$78 =</u>	<u>0</u>
Basic fee (minimum amount required) -----				<u>690.00</u>
If filing multiple dependent claims add \$260.00 -----				
Total Filing fee -----				<u>\$690.00</u>

X Please charge Deposit Account 13-2730 in the amount of \$ 690.00
A duplicate copy of this sheet is enclosed.

X The Commissioner is hereby authorized to charge any additional fees or credit any overpayment under 37 CRF 1.16 and 1.17 which may be required during the entire pendency of the application to Deposit Account No. 13-2730. A duplicate copy of this sheet is enclosed.

☐ A check in the amount of \$ _____ to cover the filing fee is enclosed.
2-11-00
date

William D. Lanyi
Attorney of Record
William D. Lanyi
MERCURY MARINE, division of Brunswick
Corporation
W6250 Pioneer Road
P.O. Box 1939
Fond du Lac, WI 54936-1939

**SIMPLIFIED DOCKING METHOD AND APPARATUS
FOR A MULTIPLE ENGINE MARINE VESSEL**

**Inventor(s): William D. Lanyi
Jeffery C. Ehlers
Blake C. Suhre**

SIMPLIFIED DOCKING METHOD AND APPARATUS FOR A MULTIPLE ENGINE MARINE VESSEL

BACKGROUND OF THE INVENTION

5 FIELD OF THE INVENTION

The present invention relates generally to docking systems for marine vessels and, more particularly, to a simplified docking system that uses two or more propulsion systems to maneuver a marine vessel for docking purposes.

10 DESCRIPTION OF THE PRIOR ART

Various types of docking systems are known to those skilled in the art. Also, many different types of push button controls and joystick controls are known to those skilled in the art.

15 United States 5,362,269, which issued to Leach on November 8, 1994, describes a personal water vehicle. The jet motor powered water vehicle is intended for single person use. The jet powered boat includes a deck having a flat surface portion enabling a person to lie prone thereon while manually controlling the boat and steering the boat by utilizing a joystick mounted on the deck. The hull of the boat has a generally wide and shallow V-shaped configuration at a bore, 20 lower portion thereof. The hull also has a flat bottom surface at mid and aft lower portions thereof which blend with the V-shape. The hull also includes a rear portion which is curved and upwardly slanted at a lower portion thereof.

25 United States patent 4,414,438, which issued to Maier et al on November 8, 1983, describes a video game controller. The video game joystick controller includes a lower housing which defines a lower convex bearing surface, an upper housing which defines an upper concave bearing surface concentric with the lower bearing surface, and a handle which defines inner and outer bearing surfaces. The

inner bearing surface of the handle is adapted to mate with the lower bearing surface of the lower housing and the outer bearing surface of the handle is adapted to mate with the upper bearing surface of the upper housing such that the handle is free to pivot with a smooth action.

5 United States patent 5,090,929, which issued to Rieben on February 25, 1992, describes a paired motor system for small boat propulsion and steering. Paired spaced electrically driven motors provide a steerable propelling system for small boats. Each motor drives a propeller carried in an elongate channel, communicating with each lateral side of a boat beneath the water line to one boat
10 end, to move water through such channels for boat propulsion. The electrical motors are of variable speed, reversible, and separately controlled by a joystick type control device to provide differential control of motor speed to allow steering. The propelling system provides a low speed, maneuverable propulsion system for fishing use, as an auxiliary power system for boats having a separate principal powering system, and to aid maneuverability alone or in conjunction with the
15 principal powering system.

The patents described above are hereby expressly incorporated by reference in this description.

20 United States patent application number 09/078,976, which was filed by Alexander et al on May 14, 1998 and assigned to the assignee of the present patent application, describes a water jet docking control system for a marine vessel.

Known docking systems require additional propulsion units to be employed solely for the purpose of maneuvering a marine vessel at low speeds for the purpose of docking the marine vessel. The requirement of maneuvering propulsion
25 systems, in addition to the primary propulsion system, increases the cost of marine vessels. It would therefore be significantly beneficial if a means could be provided for allowing an operator to control the maneuvering of a marine vessel during

docking procedures by utilizing the normal propulsion systems of the vessel. This would significantly simplify the maneuvering, or docking, process while minimizing the overall cost of the docking system.

SUMMARY OF THE INVENTION

A preferred embodiment of the present invention provides a method for maneuvering a marine vessel which comprises the steps of providing a first marine propulsion unit which is attachable to a transom of the marine vessel and also providing a second marine propulsion unit which is also attachable to the transom of the marine vessel. Although the present invention can also be utilized with a third marine propulsion unit, it is not necessary to provide additional marine propulsion units beyond a first pair. The present invention further comprises the steps of receiving a maneuver command signal from a manually controllable device. The manually controllably device can be a joystick or a plurality of push buttons which an operator can activate to convey a maneuver command to a controller of the present invention. The present invention further comprises the step of calculating a first magnitude of thrust for the first marine propulsion unit as a function of the maneuver command and calculating a second magnitude of thrust for the second marine propulsion unit as a function of the maneuver command.

The first and second magnitudes of thrust are calculated to create a resultant force vector imposed on the marine vessel in combination with a resultant moment about an instantaneous center of turn of the marine vessel which will achieve the maneuver command received from the manually controllable device.

Certain embodiments of the present invention further comprise the steps of causing the first marine propulsion unit to provide the first magnitude of thrust and causing the second marine propulsion unit to provide the second magnitude of thrust. The causing steps of the present invention can comprise the steps of

changing the operating speeds of engines which are associated with the first and second marine propulsion units. In other words, if the first and second marine propulsion units are outboard motors or stern drive systems with individual internal combustion engines, the operating speed of the two or more engines, measured in revolutions per minute, can be changed to appropriately affect the magnitudes of thrust produced by the first and second marine propulsion units. Alternatively, the causing steps of the present invention can comprise the steps of changing the pitch of each of two controllable pitch propellers associated with the first and second marine propulsion units.

Certain embodiments of the present invention can further comprise the steps of changing the relative position of the first marine propulsion unit relative to the transom in order to change the direction of the first magnitude of thrust relative to the marine vessel. Similarly, this embodiment of the present invention would also comprise changing the relative position of the second marine propulsion unit relative to the transom in order to change the direction of the second magnitude of thrust relative to the marine vessel. In other words, two outboard motors can be steered in a direction other than straight ahead in certain embodiments of the present invention while other embodiments can leave the two outboard motors positioned as they would be for straight ahead travel of the marine vessel. The first and second marine propulsion units can be stern drive systems, outboard motors, or inboard drives. The manually controllable device can be a joystick or a device which comprises a plurality of push buttons.

An apparatus made in accordance with the present invention comprises first and second marine propulsion units which are attachable to a transom of a marine vessel. It further comprises a manually controllable device which has an output that is representative of a maneuver command provided by a marine vessel operator. It also comprises first and second means for calculating a first magnitude

of thrust and a second magnitude of thrust, respectively, for the first and second marine propulsion units, respectively, as a result of the maneuver command received from the manually controllably device. The first and second calculating means are typically incorporated as part of a micro-processor. The micro-processor can be included as a component within an engine control unit.

The present invention can further comprise means for causing the first and second marine propulsion units to actually provide the first and second magnitudes of thrust. This can be accomplished either by changing the operating speeds of the two engines associated with the two marine propulsion units or, alternatively, by changing the pitch of the blades of the controllable pitch propellers of the two marine propulsion units. The two marine propulsion units can be directed in a straight ahead configuration or, alternatively, can be positioned at directions other than perpendicular to the transom of the boat. These positions can provide parallel thrusts or, alternatively, thrust vectors which are not parallel to each other.

Throughout the description of the present invention, it should be clearly understood that the two or more marine propulsion devices are capable of providing thrust in either of two opposing directions, forward and reverse.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be more fully and completely understood from a reading of the description of the preferred embodiment in conjunction with the drawings, in which:

Figure 1 is a simplified schematic representation of the present invention;

Figure 2 shows a joystick that can be used with the present invention;

Figure 3 shows a push button device that can be used in conjunction with the present invention;

Figures 4-8 show various situations in which marine propulsion units are used to provide thrust vectors that are imposed on a marine vessel;

Figure 9 is a thrust vector diagram representing one possible combination of thrust vectors on a marine vessel;

Figure 10 shows a simplified vector diagram showing a possible combination of thrust vectors on a marine vessel;

Figure 11 shows a thrust diagram for a circumstance in which the thrust vectors provided by first and second marine propulsion units are not parallel to each other; and

Figure 12 shows a variation of the present invention for independently movable outboard motors.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Throughout the description of the preferred embodiment of the present invention, like components will be identified by like reference numerals.

Figure 1 shows the basic arrangement of the primary elements of the present invention. A manual controller 10 is provided to allow a marine vessel operator to provide an input representing a desired maneuvering activity. The manual controller 10 can be a joystick or a plurality of buttons by which the marine vessel operator is able to convey certain commands to an engine control unit 14 which represent maneuver commands. These commands can be relatively simple, such as straight ahead, reverse, rotate counterclockwise, and rotate clockwise. The engine control unit (ECU) 14 receives the commands from the manual controller 10, as represented by arrows 21 and 22. In a typical arrangement, the signals received on lines 21 and 22 would represent a choice between full speed ahead and full speed reverse on line 21 and between full speed counterclockwise and full speed clockwise on line 22. With these two inputs, the ECU 14 calculates the

appropriate thrust values for the two marine propulsion units attached to the transom of the marine vessel and provides speed control commands for both units and direction control commands for both units. These are provided on lines 31 and 32, respectively. It should be understood that the present invention contemplates two distinctly different potential modes of operation. For example, the direction control for both units represented by box 42 in Figure 1, in certain embodiments, can be a simple command to maintain both engines at perpendicular thrust vector positions relative to the transom of the marine vessel. In this mode of operation, with both marine propulsion units restricted to a straight ahead position relative to the transom, the speed commands for the two units, as represented by box 41 in Figure 1 would vary in both magnitude and direction (i.e. forward or reverse) to achieve the maneuver command provided by the operator with the manual controller 10. Alternatively, the direction control for both marine propulsion units can provide commands which cause the two marine propulsion units to turn either to the left or right relative to the transom in a parallel maneuver or, alternatively, the two engines can be directed independently of each other.

It should be understood that the present invention anticipates the use of a “drive by wire” system in which physical connections are not provided between the operator’s station and the marine propulsion units. Instead of using cables or mechanical linkages, as are common in many marine vessels, the marine vessel on which the present invention is used provides electronic signals which convey both steering and propulsion commands from the operator station to the marine propulsion units. In this type of system, no direct mechanical connection is provided between the operator’s station and the marine propulsion units. As a result, the two marine propulsion units can be operated independently from each other, under the control of the ECU 14, in terms of both speed of operation and direction of the thrust vectors provided by the two marine propulsion units.

Figures 2 and 3 show two possible types of manual controllers, such as that described above in Figure 1 and identified by reference numeral 10. Figure 2 shows a well known joystick device that comprises a base 50, a stick or lever 52, and an end configuration 54 that is suitable for movement by an operator's hand. Typically, the stick 52 can be moved left and right and forward and backward relative to the base 50. The operation of joysticks is very well known to those skilled in the art and will not be described in detail herein. Figure 3 shows an alternative configuration that provides a base 60 which has four push buttons or pads 61-64. A forward pad 61 and a reverse pad 62 can be incorporated to provide the signal on line 21 of Figure 1. Similarly, a counterclockwise rotation pad 63 and a clockwise rotation pad 64 can be combined to provide the signal on line 22 of Figure 1. Regardless of whether a joystick is used or a plurality of push buttons is used, the basic signals received by the micro-processor of an engine control unit (ECU) 14 typically reflect a combined signal for the forward/rearward resultant command and another signal for the counterclockwise/clockwise resultant command. With the four buttons shown in Figure 3, or the joystick shown in Figure 2, an operator of a marine vessel can convey the desired maneuver command to the micro-processor of the present invention.

Throughout the description of the preferred embodiment, it should be understood that the force vectors, F_1 and F_2 can be positive or negative.

Figure 4 is a highly simplified schematic representation of a marine vessel 70 with a first marine propulsion unit 71 and a second marine propulsion unit 72 attached for rotation to a transom 76 of the marine vessel 70. Points 81 and 82 represent the points about which the marine propulsion units can rotate while remaining attached to the transom 76. Point 90 represents the instantaneous center of turn of the marine vessel 70 in response to forces exerted on the marine vessel. In other words, the instantaneous center of turn 90 is a function of several factors

which comprise the speed of the vessel as it moves through the water, the hydrodynamic forces on the hull of the marine vessel 70, the weight distribution of the load contained within the marine vessel 70, and the degree to which the boat is disposed below the waterline. The location of the instantaneous center of turn 90 can be empirically determined for various sets of conditions. For purposes of describing the operation of the present invention, it will be presumed that the location of the instantaneous center of turn 90 is known by the software operating within a micro-processor of the engine control unit 14. A centerline 94 of the marine vessel 70 is drawn through the instantaneous center of turn 90. Centerlines, 101 and 102, are shown extending through the first and second marine propulsion units, 71 and 72, co-linearly with the first and second thrust vectors, 111 and 112, produced by the first and second marine propulsion units, 71 and 72.

With continued reference to Figure 4, it should be understood that a primary advantage of the present invention is that it uses the first and second marine propulsion units, 71 and 72, as the maneuvering or docking propulsion units by advantageously positioning the propulsion units relative to the transom 76 and selectively commanding each of the two engines associated with the propulsion units to produce a selected magnitude of thrust. By appropriately selecting the first and second magnitudes of thrust, 111 and 112, the marine vessel 70 can be maneuvered in response to a maneuver command received from the manually controllable device 10. In a normal situation, where the two marine propulsion units are spaced equally apart from the centerline 94, each of the two thrust vectors, 111 and 112, will produce a moment about the instantaneous center of turn 90 that is equivalent to the force of the vector multiplied by dimension X. The first magnitude of thrust 111 will produce a clockwise moment about the instantaneous center of turn 90 while the second magnitude of thrust 112 will produce a counterclockwise moment about the instantaneous center of turn 90. If the first

and second magnitudes of thrust, 111 and 112 are equal to each other, a forward movement of the marine vessel 70 will result and there will be no rotational movement about the instantaneous center of turn 90. However, if the first and second magnitudes of thrust are unequal in either magnitude or direction, the marine vessel 70 will be caused to rotate about the instantaneous center of turn 90.

Figure 5 is similar to Figure 4, but the first and second magnitudes of thrust are reversed. This will result in a rearward movement of the marine vessel 70 if the two thrust vectors are equal in both direction and magnitude. If both marine propulsion units, 71 and 72, produce reverse thrust, but the two magnitudes of thrust are unequal, rotation of the marine vessel 70 about the instantaneous center of turn 90 will result.

With reference to Figures 4 and 5, the following equations describe the forces imposed on the marine vessel 70:

$$MCW = F1(X) - F2(X) \quad (1)$$

$$FR = F1 + F2 \quad (2)$$

In the equations shown above, MCW is the moment in a clockwise direction about the instantaneous center of turn 90 and FR is the resultant force in a forward direction on the vessel 70 where vectors directed upwardly and toward the right are assumed to be positive and clockwise rotation is assumed to be positive. Naturally, if vector F2 is greater than vector F1 in magnitude, the moment in a clockwise direction MCW will be negative and will represent a moment in a counterclockwise direction.

It can be seen from equations 1 and 2, shown above, that the circumstance represented in Figure 5 would result in a negative resultant force FR and the vessel 70 would move in a reverse direction. Depending on the magnitudes of the two vectors, F1 and F2, the marine vessel 70 could move directly in a reverse direction

without any rotation about the instantaneous center of turn 90 or the marine vessel 70 can also rotate about the instantaneous center of turn.

Figure 6 shows a circumstance in which the two marine propulsion units produce force vectors in opposite directions. This will result in a counterclockwise rotation of the marine vessel 70 about the instantaneous center of turn 90 as represented by arrow CCW. Depending on the relative magnitudes of the first and second thrust vectors, F1 and F2, the marine vessel 70 may also move in a forward or reverse direction in combination with the counterclockwise rotation. The magnitudes of the force vectors are determined by the present invention based on the inputs received as the maneuver command from the manual controller 10. If no port or starboard commands, as represented by buttons 63 and 64 in Figure 3, are received from the manual controller 10, the micro-processor of the engine control unit 14 would calculate equal thrust vectors, F1 and F2, to respond to a counterclockwise command on push button 63.

Figure 7 shows a situation in which the first and second thrust vectors, F1 and F2, are in the same direction, but are clearly of different values. This would produce a clockwise rotation of the marine vessel 70 about the instantaneous center of turn 90, as represented by arrow CCW and would simultaneously result in a forward motion of the marine vessel 70.

With reference to both Figures 6 and 7, it should be understood that each of the two force vectors in both drawings can be reversed to result in the opposite effect. With reference to Figures 4, 5, 6, and 7, it can be seen that the stationary positions of the first and second marine propulsion units, 71 and 72, relative to the transom 76, can be advantageously used to move the marine vessel 70 straight ahead as shown in Figure 4 or directly in reverse as shown in Figure 5 by maintaining equal thrust vectors from both marine propulsion units. It can also be seen that a counterclockwise or clockwise rotation of the marine vessel 70 can be

achieved by providing equal force vectors, F1 and F2, in opposite directions as shown in Figure 6. Figure 7 illustrates that force vectors of unequal magnitudes can be used to combine clockwise or counterclockwise rotation of the marine vessel 70 about its instantaneous center of turn 90 in combination with a net forward or reverse movement. None of the maneuvers described above in conjunction with Figures 4, 5, 6, and 7 require that the first or second marine propulsion systems, 71 or 72, be moved away from a straight ahead position in which their respective thrust vectors, F1 and F2 are generally perpendicular to the transom 76 of the marine vessel 70.

Figures 8 and 9 represent a situation in which the two marine propulsion units, 71 and 72, are positioned in a non-perpendicular association with the transom 76. The two marine propulsion units are both moved to a position in which their respective thrust vectors, F1 and F2, remain parallel to each other. The diagram in Figure 9 represents the geometric relationships resulting from the movement of the marine propulsion units to a position shown in Figure 8. The following equations describe the relationships in Figure 9:

$$MCW = F1(A1) \quad (3)$$

$$MCCW = F2(A1 + A2) \quad (4)$$

$$FX = -F1 \cos \theta + F2 \cos \theta \quad (5)$$

$$FY = -F1 \sin \theta + F2 \sin \theta \quad (6)$$

$$MCCW = F2 (A1 + A2) - F1 (A1) \quad (7)$$

Equations 3-6 describe the resultant moments and forces acting on the marine vessel 70 in response to the first and second thrust vectors, F1 and F2. These include the clockwise moment MCW, the counterclockwise moment MCCW, the resultant force FX in the X direction, which is the left and right direction in Figures 8 and 9, and the resultant force FY in the Y direction, which is the upward and downward force in Figures 8 and 9. Through the use of equations 3-6, the micro-

processor of the engine control unit 14 can determine the required force vectors, F_1 and F_2 , and the required angle θ to achieve the maneuver command received from the manual controller 10 which is controlled by the operator of the marine vessel. Equation 7, shown above, is a combination of equations 3 and 4 and defines the moment in the counterclockwise direction about the instantaneous center of turn 90 in terms of both force vectors, F_1 and F_2 . With respect to Figures 8 and 9, it can be seen that force vector F_1 is negative and force vector F_2 is positive according to the normal convention adopted above.

With respect to Figure 9, all of the angles and dimensions can be determined easily through normal geometric procedures. For example, the magnitude of dimension Z between the instantaneous center of turn 90 and either of the two points of rotation, 81 and 82, can be determined through the Pythagorean Theorem because dimension X and dimension Y are both known since they are empirically determinable for any particular marine vessel 70 and operating condition.

Dimension A_1 , which is the moment arm for the first thrust vector F_1 about the instantaneous center of turn 90, is equal to the magnitude of dimension Z multiplied by the sine of angle θ . The other angles can be determined through the arc sine calculation of sides Y and Z and the fact that the three angles shown in Figure 9, added together, are equal to 180 degrees. The sum of dimensions A_1 and A_2 can be determined because the magnitude of dimension Z is known and the magnitude of the angle encompassed between line Z and the line that is co-linear with the thrust vector F_2 is known. As a result, the clockwise and counterclockwise moments about the instantaneous center of turn 90 can be determined and the net thrust in both the X and Y directions in Figure 9 can be determined based on the equations 3-6 shown above.

Figure 10 is a simplified diagram of the forces described above in conjunction with Figure 6. Equations 3-6 can be used to determine the moments

and net thrust vectors, as described above in conjunction with Figure 9, with a value of θ that is 90 degrees. If a forward direction of the vessel 70 is preselected as being positive, the first thrust vector F1 would be negative and the second thrust vector F2 would be positive. Dimensions A1 and A2 described above in conjunction with equations 3-6, would be equal to dimension X shown in Figures 6 and 10. In other words, the same equations are applicable in the condition represented in Figures 8 and 9 and also in the condition represented in the earlier figures in which the thrust vectors, F1 and F2, from the first and second marine propulsion units, 71 and 72, are perpendicular to the transom 76.

Figure 11 represents a situation in which the two thrust vectors, F1 and F2 are not parallel to each other. Furthermore, the two thrust vectors can be of different magnitudes and directions. It can be seen that the clockwise and counterclockwise moments about the instantaneous center of turn 90 and the net resultant thrust vectors in the forward and sideways directions can be geometrically determined since dimensions X and Y are known for any particular marine vessel 70, angles A and B are known because they are under direct control of the engine control unit 14, dimensions A1 and AX can be geometrically determined from the known dimensions. Therefore, although the equations used to select the appropriate first and second thrust magnitudes, F1 and F2, may be different than equations 3-6 described above, they are easily determinable by one skilled in the art based on the known dimensions shown in Figure 11.

Figure 12 is provided in order to illustrate, with specificity, how two marine propulsion devices can be used to provide a wide range of possible movements of the marine vessel 70 if the two marine propulsions devices are independently steerable. Following the conventions adopted above, the two marine propulsion devices can each provide force vectors, F1 and F2, in either a positive or negative direction. As can be seen in Figure 12, the angle between these two force vectors

and lines parallel to the centerline 94 are defined as Θ_1 and Θ_2 . The resulting forces, in the directions parallel to the X axis and Y axis in Figure 12, referred to as FX and FY, respectively, can be determined by the following equations.

$$FX = -F1 (\sin (\Theta_1)) - F2 (\sin (\Theta_2)) \quad (8)$$

$$FY = F1 (\cos (\Theta_1)) + F1 (\cos (\Theta_2)) \quad (9)$$

$$MCT = -Y (F1 (\sin (\Theta_1))) - X (F1 (\cos (\Theta_1))) \\ - Y (F2 (\sin (\Theta_2))) + X (F2 (\cos (\Theta_2))) \quad (10)$$

In equations 8-10, shown above, FX and FY represent the resulting forces on the marine vessel 70 in the directions parallel to the X axis and the Y axis 94. The moment about the center of instantaneous turn 90, which is identified above as MCT, represents the net effect of both thrust vectors, F1 and F2, on the marine vessel 70 which will induce the vessel to rotate about the instantaneous center of turn 90. By using the equations shown above, the desired movement of the marine vessel 70 can be selected in terms of FX and FY and the rotation about the instantaneous center of turn 90.

It should be understood that either of the two marine propulsion devices can be fixed at a preselected angle while the other marine propulsion device is rotated about its respective points, 81 or 82, to obtain a desired result. Table I represents 12 examples of how these results can be obtained.

TABLE I

EXAMPLE	FX	FY	MCT	Θ_2	F1	F2
1	0	10	0	0	5	5
2	10	10	0	12.53	55	-46.1
3	10	0	0	11.31	50	-50.99
4	10	-10	0	10.3	45	-55.9
5	0	-10	0	0	-5	-5

6	-10	-10	0	12.53	-55	46.1
7	-10	0	0	11.31	-50	50.99
8	-10	10	0	10.3	-45	55.9
9	0	0	10	0	-10	10
10	0	0	-10	0	10	-10
11	10	10	10	15.95	45	-36.4
12	10	10	-10	10.3	65	-55.9

With respect to example 1 in Table I, it can be seen that no starboard or port movement is desired while a forward movement of 10 units is desired with no rotation about the instantaneous center of turn 90. It should be understood that in all of the examples shown in Table I, the port marine propulsion device is fixed with angle Θ_1 equal to zero. In example 1 shown above, the starboard marine propulsion device is positioned with angle Θ_2 equal to zero and both propulsion devices are controlled to provide a force of five units each.

With continued reference to Figure 12 and Table I, example 2 shows a desired combination of thrusts on the marine vessel 70 of 10 units in the starboard direction and 10 units in the forward direction. In order to obtain this result with the port marine propulsion device set at 0 degrees, as described above, the starboard marine propulsion device would be set at an angle Θ_2 equal to 12.52 degrees and with F_1 equal to 55 units and F_2 equal to -46.1 units.

It can be seen that examples 1 through 8 in Table I all result in no rotation about the instantaneous center of turn 90. Examples 9 and 10 result in no starboard or forward forces, but with a rotation of the marine vessel 70 about the instantaneous center of turn 90. Examples 11 and 12 in Table I result in starboard and forward forces in combination with rotations of the marine vessel 70 about the instantaneous center of turn 90.

As described above, the examples illustrated in Table I and shown in Figure 12 all assume that the port marine propulsion device is set at an angle Θ_1 equal to zero and all of the maneuvering is performed with movements of the starboard marine propulsion device in combination with changes in the thrust vectors provided by the two marine propulsion devices. It should be understood that this is a highly simplified example and, furthermore, that a full range of movements of the marine vessel 70 can be accomplished by steering both marine propulsion devices independently from each other while not requiring that one of the marine propulsion devices be fixed relative to the transom of the marine vessels 70. However, the examples described above in conjunction with Figure 12 clearly show the wide range of movements that are possible when the two marine propulsion devices are independently steerable and independently controllable in terms of the magnitude and direction of the thrust provided by the two devices.

As described above, the present invention provides a method and apparatus for selectively determining the required thrust vectors produced by first and second marine propulsion units to achieve a maneuver command provided by a marine vessel operator through the use of a joystick or a series of push buttons. The method and apparatus of the present invention do not require additional marine propulsion units beyond those needed to propel the marine vessel under normal conditions. The joystick or push button commands received from the manual controller are used to calculate the required thrust vectors for the two propulsion units and the thrusts are then controlled to achieve the commanded maneuver.

Although the present invention has been described with particular detail and illustrated specifically to show one or more preferred embodiments of the present invention, it should be understood that alternative embodiments are also within its scope.

I claim:

1. A method for maneuvering a marine vessel, comprising the steps of:

5 providing a first marine propulsion unit which is attachable to a transom of said marine vessel;

providing a second marine propulsion unit which is attachable to said transom of said marine vessel;

receiving a maneuver command from a manually controllable device;

10 calculating a first magnitude of thrust for said first marine propulsion unit as a function of said maneuver command; and

calculating a second magnitude of thrust for said second marine propulsion unit as a function of said maneuver command, said first and second magnitudes of thrust being calculated to create a resultant force vector imposed on said marine vessel and a resultant moment about an instantaneous center of turn of said marine vessel which will achieve said maneuver command.

2. The method of claim 1, further comprising:

15 causing said first marine propulsion unit to provide said first magnitude of thrust; and

causing said second marine propulsion unit to provide said second magnitude of thrust.

3. The method of claim 2, wherein:

25 said causing steps comprise the steps of changing the operating speeds of engines which are associated with said first and second marine propulsion units.

4. The method of claim 2, wherein:

said causing steps comprise the steps of changing the pitch of controllable pitch propellers associated with said first and second marine propulsion units.

5 5. The method of claim 1, further comprising:

changing the relative position of said first marine propulsion unit relative to said transom to change the direction of said first magnitude of thrust relative to said marine vessel; and

changing the relative position of said second marine propulsion unit relative to said transom to change the direction of said second magnitude of thrust relative to said marine vessel.

6. The method of claim 1, wherein:

said first marine propulsion unit is a first outboard motor; and
said second marine propulsion unit is a second outboard motor.

7. The method of claim 1, wherein:

said first marine propulsion unit is a first sterndrive system; and
said second marine propulsion unit is a second sterndrive system.

8. The method of claim 1, wherein:

said manually controllable device is a joystick.

9. The method of claim 1, wherein:

said manually controllable device comprises a plurality of push buttons.

10. The method of claim 1, further comprising:

causing said first and second marine propulsion units to be positioned to direct the first and second magnitudes of thrust in a direction perpendicular to said transom.

5

11. An apparatus for maneuvering a marine vessel, comprising:

means for providing a first marine propulsion unit which is attachable to a transom of said marine vessel;

means for providing a second marine propulsion unit which is attachable to said transom of said marine vessel;

means for receiving a maneuver command from a manually controllable device;

first means for calculating a first magnitude of thrust for said first marine propulsion unit as a function of said maneuver command; and

second means for calculating a second magnitude of thrust for said second marine propulsion unit as a function of said maneuver command, said first and second magnitudes of thrust being calculated to create a resultant force vector imposed on said marine vessel and a resultant moment about an instantaneous center of turn of said marine vessel which will achieve said maneuver command.

20

12. The apparatus of claim 11, further comprising:

means for causing said first marine propulsion unit to provide said first magnitude of thrust; and

means for causing said second marine propulsion unit to provide said second magnitude of thrust.

25

13. The apparatus of claim 11, further comprising:

means for changing the relative position of said first marine propulsion unit relative to said transom to change the direction of said first magnitude of thrust relative to said marine vessel; and

5 means for changing the relative position of said second marine propulsion unit relative to said transom to change the direction of said second magnitude of thrust relative to said marine vessel.

14. The apparatus of claim 11, wherein:

10 said manually controllable device is a joystick.

15. The apparatus of claim 11, wherein:

said manually controllable device comprises a plurality of push buttons.

16. The apparatus of claim 11, further comprising:

15 means for causing said first and second marine propulsion units to be positioned to direct said first and second magnitudes of thrust in a direction perpendicular to said transom.

20 17. The apparatus of claim 11, wherein:

an engine control unit comprises a microprocessor which comprises said first and second calculating means, said receiving means being connected in signal communication with said microprocessor.

25 18. An apparatus for maneuvering a marine vessel, comprising:

a first marine propulsion unit which is attachable to a transom of said marine vessel;

a second marine propulsion unit which is attachable to said transom of said marine vessel;

a manually controllable device which has an output that is representative of a maneuver command;

5 first means for calculating a first magnitude of thrust for said first marine propulsion unit as a function of said maneuver command; and

second means for calculating a second magnitude of thrust for said second marine propulsion unit as a function of said maneuver command, said first and second magnitudes of thrust being calculated to create a resultant force vector imposed on said marine vessel and a resultant moment about an instantaneous center of turn of said marine vessel which will achieve said maneuver command.

19. The apparatus of claim 18, further comprising:

means for causing said first marine propulsion unit to provide said first magnitude of thrust; and

means for causing said second marine propulsion unit to provide said second magnitude of thrust.

20. The apparatus of claim 19, further comprising:

20 means for changing the relative position of said first marine propulsion unit relative to said transom to change the direction of said first magnitude of thrust relative to said marine vessel; and

means for changing the relative position of said second marine propulsion unit relative to said transom to change the direction of said second magnitude of thrust relative to said marine vessel.

ABSTRACT OF THE INVENTION

A docking system is provided which utilizes the marine propulsion unit of a marine vessel, under the control of an engine control unit that receives command signals from a joystick or push button device, to respond to a maneuver command from the marine operator. The docking system does not require additional propulsion devices other than those normally used to operate the marine vessel under normal conditions. The docking or maneuvering system of the present invention uses two marine propulsion units to respond to an operator's command signal and allows the operator to select forward or reverse commands in combination with clockwise or counterclockwise rotational commands either in combination with each other or alone.

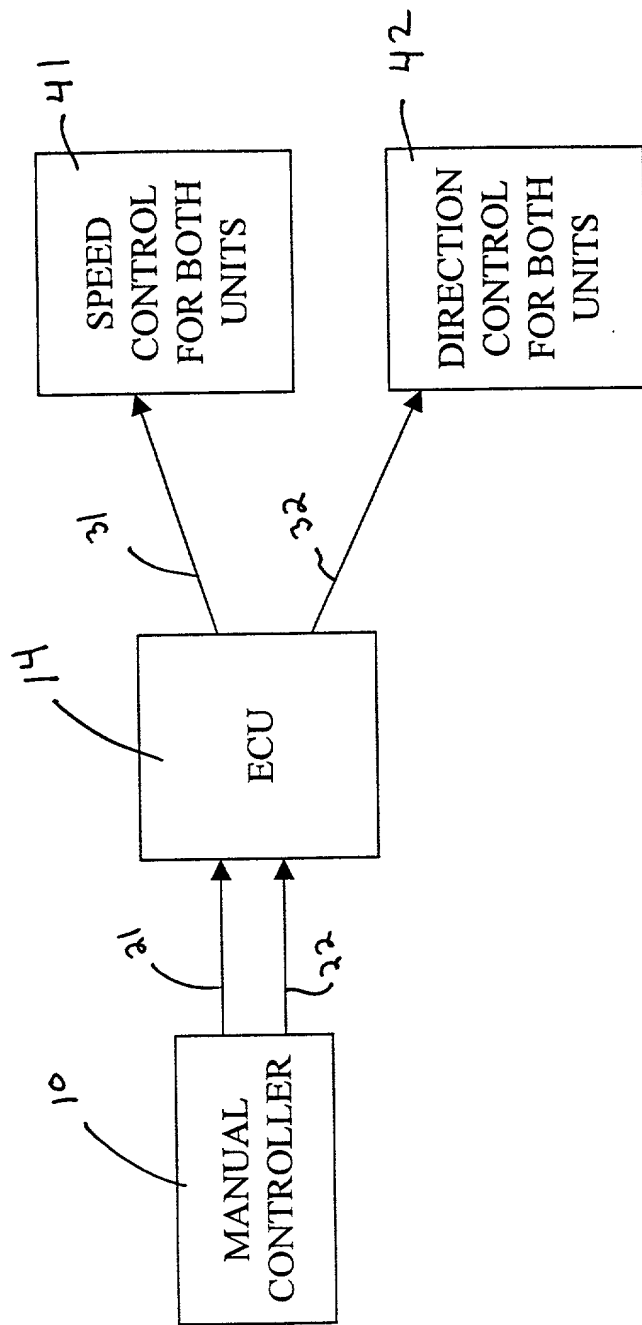


FIGURE 1

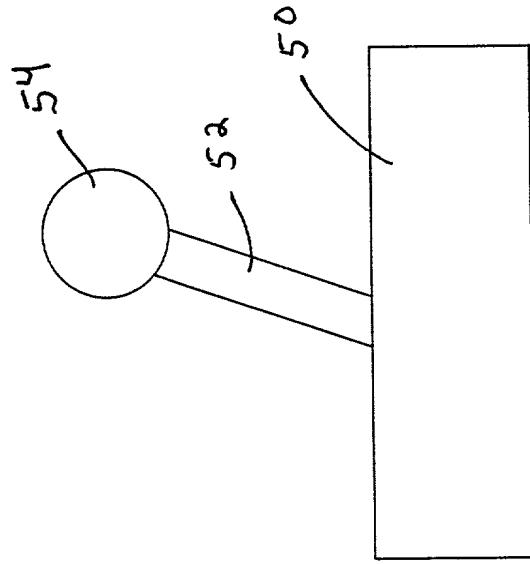


FIGURE 3

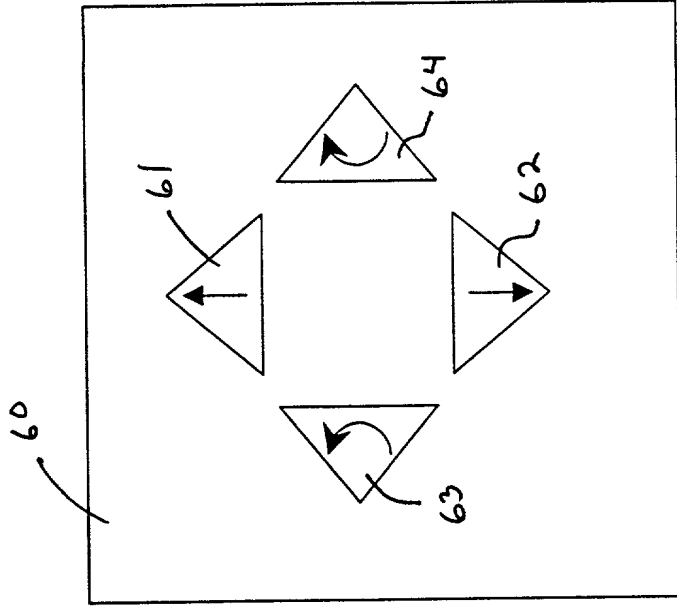


FIGURE 3

FIGURE 4

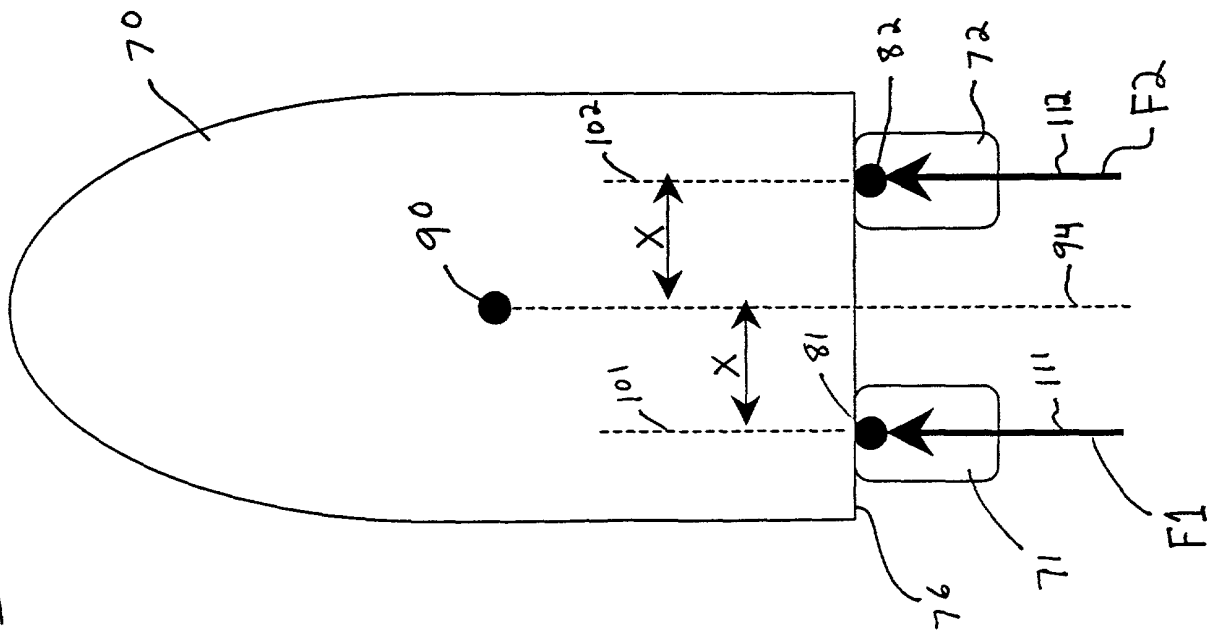


FIGURE 5

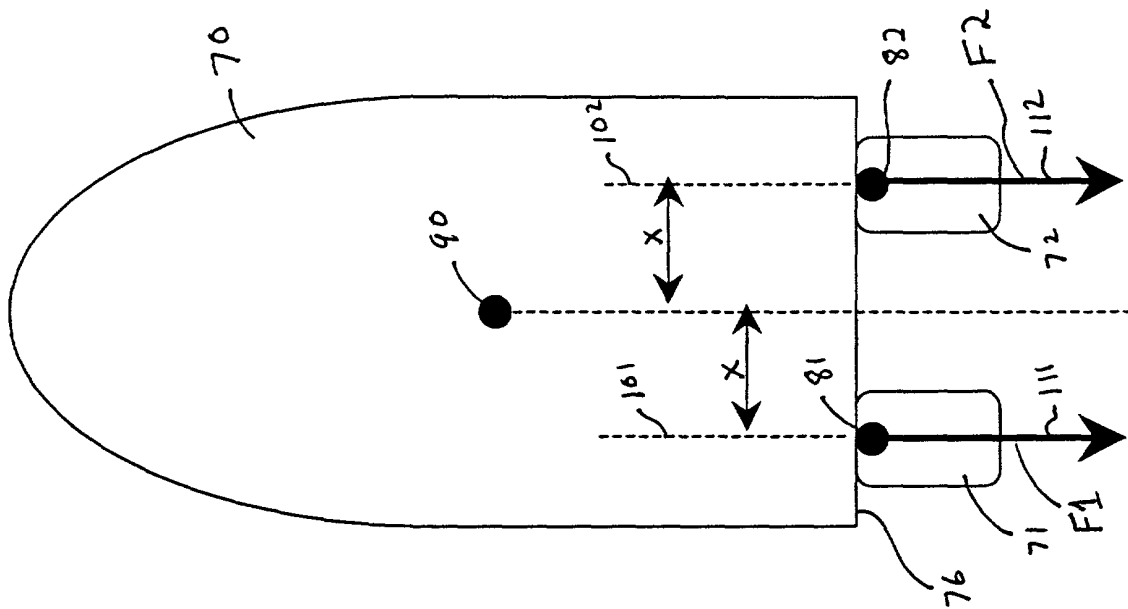


FIGURE 6

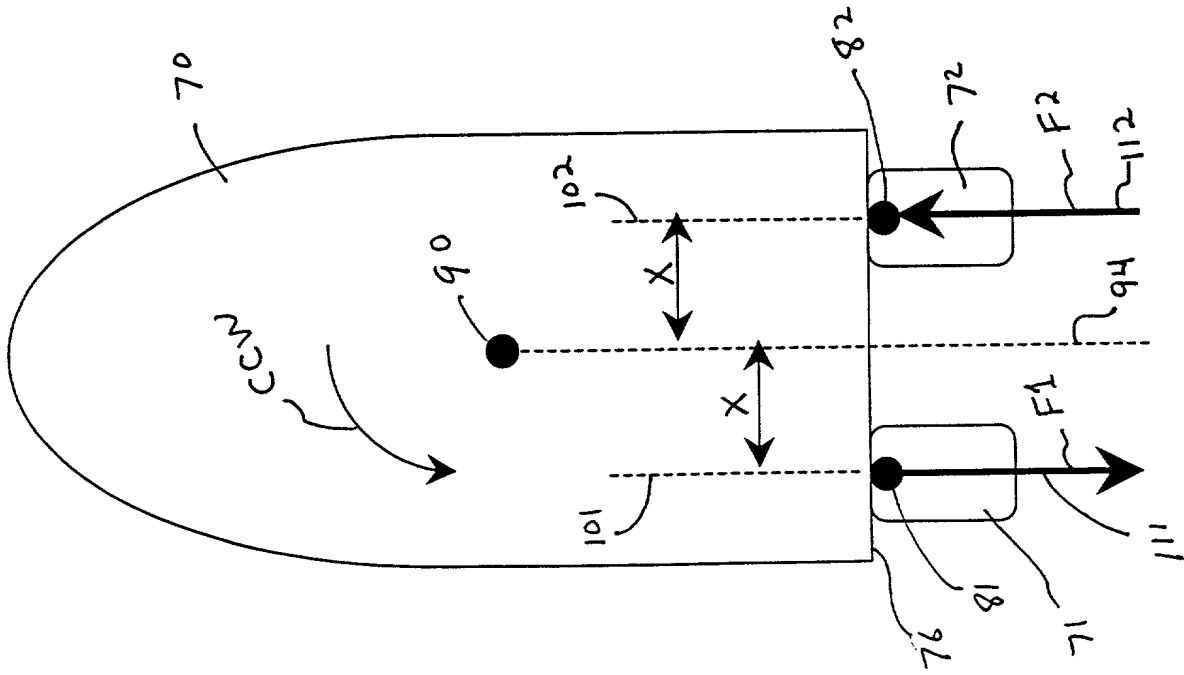


FIGURE 7

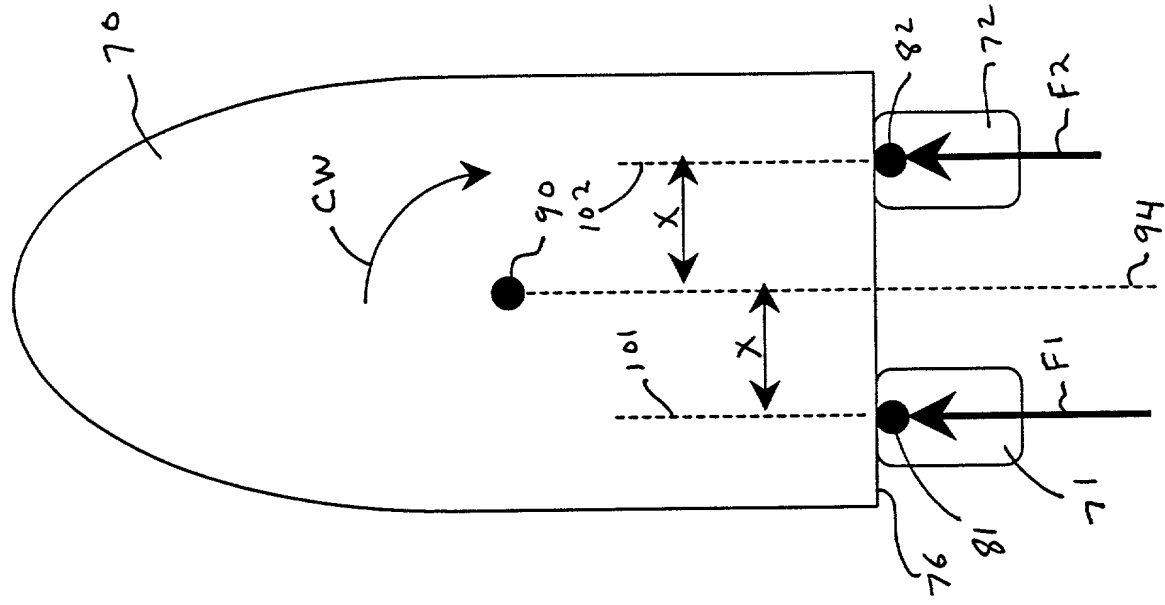


FIGURE 10

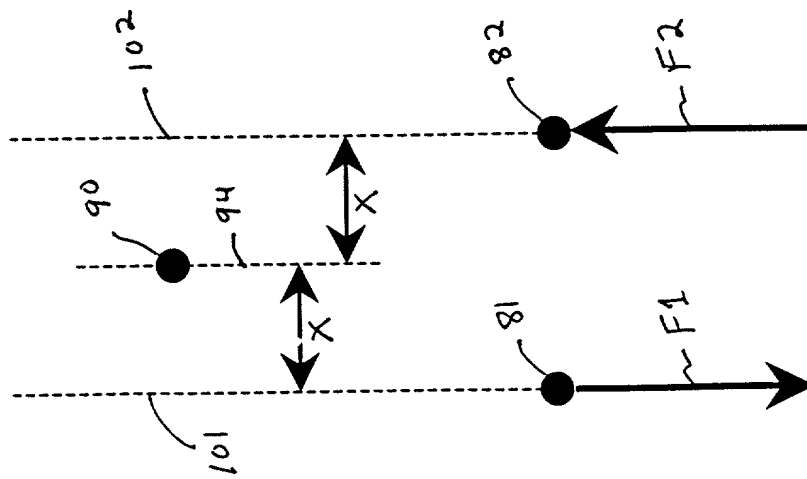
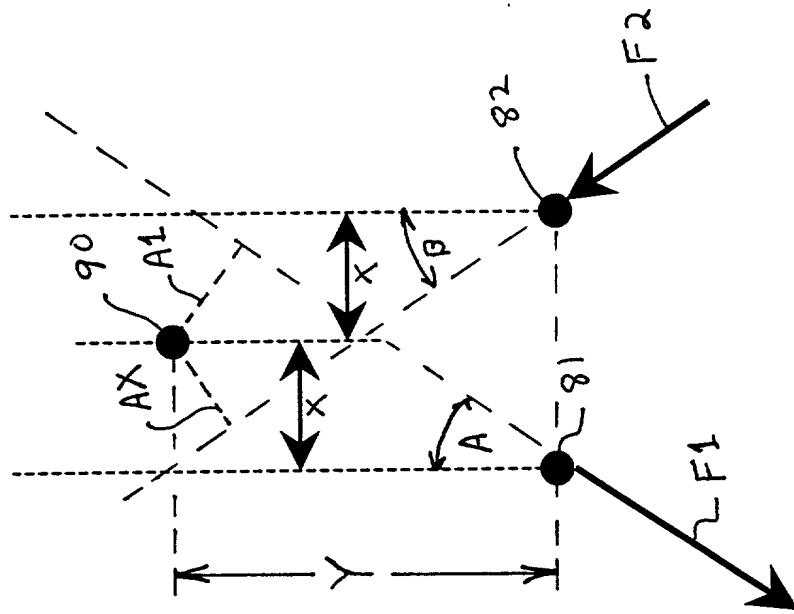


FIGURE 11



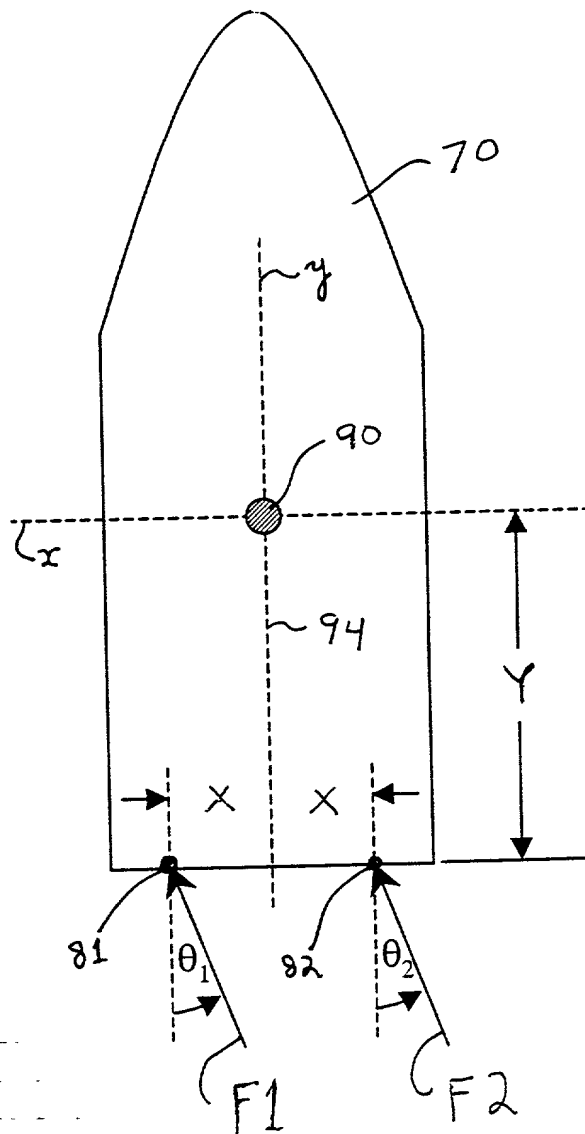


FIGURE 12

PATENT

FILE NO. M09370

Declaration and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Simplified Docking Method and Apparatus for a Multiple Engine Marine Vessel

The specification of which

(check one) ☒ is attached hereto
☐ was filed on _____ as
Application Serial No. _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).*

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Applications(s)			Priority Claimed	
			<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Day/Month/Year Filed)		

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
--------------------------	---------------	---

I hereby appoint the following attorney(s) and/or agents(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: William D. Lanyi (Reg. No. 30,190), and Michael E. Taken (Reg. No. 28,120).

Address all telephone calls to William D. Lanyi
at telephone number (414) 929-5419.

Address all correspondence to William D. Lanyi,
Director of Intellectual Property
Mercury Marine, Division of Brunswick
Corporation

W6250 Pioneer Road
P.O. Box 1939
Fond du Lac, WI 54936-1939

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole
or First Inventor
Inventor's Signature
Residence
Citizenship
Post Office Address

William D. Lanyi
[Signature] Date 2-10 20 00
N7740 Fineview Road; Malone, WI 53049
United States
N7740 Fineview Road; Malone, WI 53049

Full Name of second
Joint Inventor, if any
Inventor's Signature
Residence
Citizenship
Post Office Address

Jeffery C. Ehlers
[Signature] Date 2-10 20 00
430 Kraft St.; Neenah, WI 54956
United States
430 Kraft St.; Neenah, WI 54956

Full Name of third
Joint Inventor, if any
Inventor's Signature
Residence
Citizenship
Post Office Address

Blake R. Suhre
[Signature] Date 2-10 20 00
684 Yorkshire Road; Neenah, WI 54956
United States
684 Yorkshire Road; Neenah, WI 54956

Full Name of fourth
Joint Inventor, if any
Inventor's Signature
Residence
Citizenship
Post Office Address

_____ Date _____ 20 _____

Full Name of fifth
 Joint Inventor, if any _____
 Inventor's Signature _____ Date _____ 20 ____
 Residence _____
 Citizenship _____
 Post Office Address _____

Full Name of sixth
 Joint Inventor, if any _____
 Inventor's Signature _____ Date _____ 20 ____
 Residence _____
 Citizenship _____
 Post Office Address _____

*Title 37, Code of Federal Regulations §1.56:

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is cancelled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is cancelled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

(1) prior art cited in search reports of a foreign patent office in a counterpart application, and

(2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

(1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or

(2) It refutes, or is inconsistent with, a position the applicant takes in:

(i) Opposing an argument of unpatentability relied on by the Office, or

(ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

(1) Each inventor named in the application;

(2) Each attorney or agent who prepares or prosecutes the application; and

(3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.